


# V-5ESC/HP-185T3 VIBRATORY DRIVER/EXTRACTOR

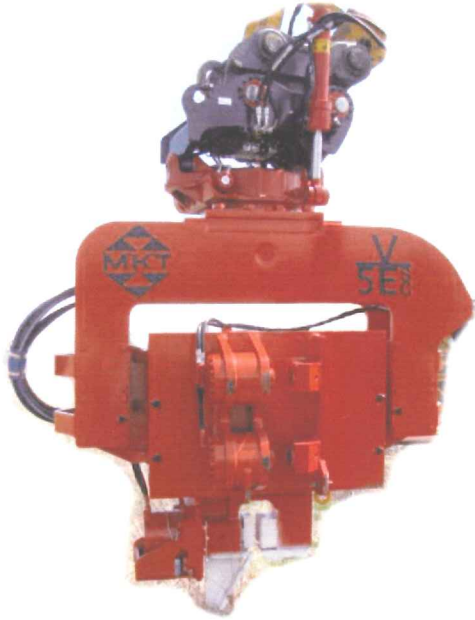

## HAMMER


	V-5ESC
DRIVING FORCE	53 tons 472 kN
FREQUENCY	1,700 CPM
ECCENTRIC MOMENT	1,300 in-lbs. 1,500 kg-cm
AMPLITUDE	1 in. 25.4 mm
CLAMPING FORCE	62 tons 550 kN
MAX. LINE PULL FREE HANGING	30 tons 267 Kn
MAX. LINE PULL W/ SIDE CLAMP	15 tons 134 Kn
MAX. CROWD W/ SIDE CLAMP	10 tons 89 Kn
HEIGHT OF HAMMER	78 in. 1,981 mm
THROAT WIDTH	13 in. 330 mm
SHIPPING WIDTH	85 in. 2,158 mm
WEIGHT AS SHOWN	10,000 lbs. 4,550 kg
FREE HANGING WEIGHT	6,200 lbs. 2,821 kg.
HOSE BUNDLE LENGTH	100 ft. 30 m

## V-5ESC

## POWER UNIT

	HP-185T3
ENGINE HP	185 HP 138 kW
OPERATING SPEED	2,100 RPM
HYD. FLOW	75 GPM 284 lpm
HYD. PRESSURE	3,000 psi 207 bar
LENGTH	120 in. 3,048 mm
WIDTH	47 in. 1,193 mm
HEIGHT	66 in. 1,676 mm
WEIGHT	5,750 lbs. 2,616 kg

## HP-185T3

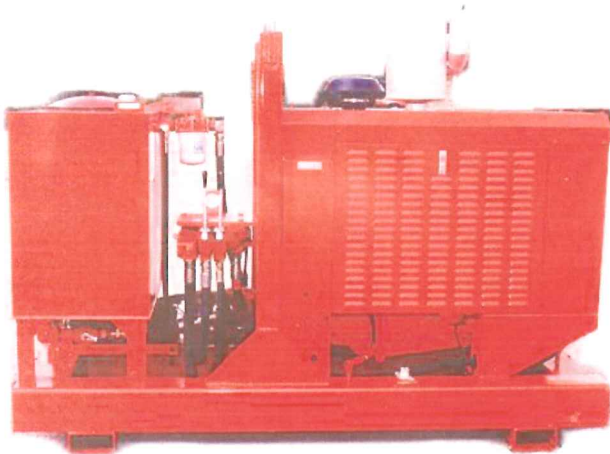

**MANUFACTURING, INC.**

1198 Pershall Road  
St. Louis, MO 63137  
(314) 388-2254

[www.mktpileman.com](http://www.mktpileman.com)

Email: [info@mktpileman.com](mailto:info@mktpileman.com)

MKT Manufacturing, Inc. reserves the right to amend these specifications at any time without notice. The only warranty is our standard written warranty. We make no other warranty, expressed or implied.